


Pressure regulator U23AC


spectro**tec**



U23AC for acetylene

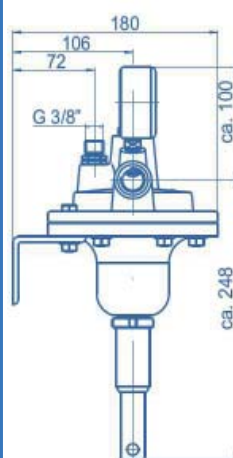

Dimensions

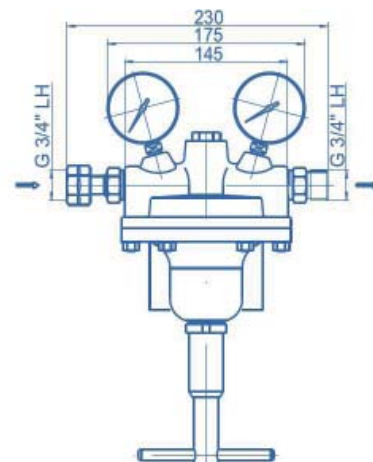

with wall bracket
723 16762

Product features

- Diaphragm line pressure regulator
- Specially for acetylene
- For flow rates up to 12 m³/h acetylene
- Single-stage with high control accuracy
- Central filter in the pressure regulator
- Safety pressure gauge acc. to DIN ISO 5171
- Pressure regulator with integrated relief valve
- Wall bracket as accessory available

Technical data

Type	single-stage
Flow rate Q	max. 12 m ³ /h
Inlet pressure P₁	max. 1.5 bar
Outlet pressure P₂	max. 1.5 bar
Materials	
Body:	brass
Bonnet:	Alu, powder coated
Valve seat:	PA
Diaphragm:	EPDM
Connections	
Inlet (bull nose):	G 3/4" LH nut
Outlet (bull nose):	G 3/4" LH male
Pressure gauge ports:	G 1/4" female
Outlet relief valve:	G 3/8" male
Temperature range	-20°C to +60°C
Leak rate	≤10 ⁻⁴ mbar l/s He
Weight	ca. 6.5 kg

Flow rates and Performance factor

U23AC	Flow rate Q [m ³ /h] at P ₂ [bar]			
	P ₁ 0,5	1	1,2	1,5
1,5 bar	12	12	12	12

Article number

U23-AC-1,5-1,5

717 07968

Performance factor L₁₀ = 7.5