

# Panel / Line regulator E53-2



Line pressure regulator LE53-6



Example: PE53 panel mounted


## Product features

- 2-stage diaphragm line pressure regulator or for panel and panel surface mounting with anti-vibration device
- For corrosive, toxic gases and gas mixtures up to quality 6.0
- 2 ports for flexible and individual configuration
- Very high control accuracy
- Metal-to-metal seal to atmosphere
- Central filter
- Approved for use with oxygen
- New laboratory-style design
- Suitable for ECD applications
- Pressure regulator can be evacuated

## Technical data

<b>Inlet pressure <math>P_1</math></b>	max. 300 bar
<b>Max. outlet pressure <math>P_2</math></b>	1,5 / 4 / 10 / 20 bar
<b>Materials</b>	
Body:	Stainless steel 1.4404
Diaphragm:	Hastelloy C276
Valve seat:	PVDF
Soft goods:	FKM, PCTFE
Filter:	Stainless steel 1.4404
<b>In- / outlets</b>	1/4"-NPT female
<b>Temperature range</b>	-20°C to +60°C
<b>Leakrate (to atmosphere):</b>	$\leq 10^{-8}$ mbar l/s He
(via seat):	$\leq 10^{-6}$ mbar l/s He
<b>Weight</b>	1,6 kg


## Flow curves E53

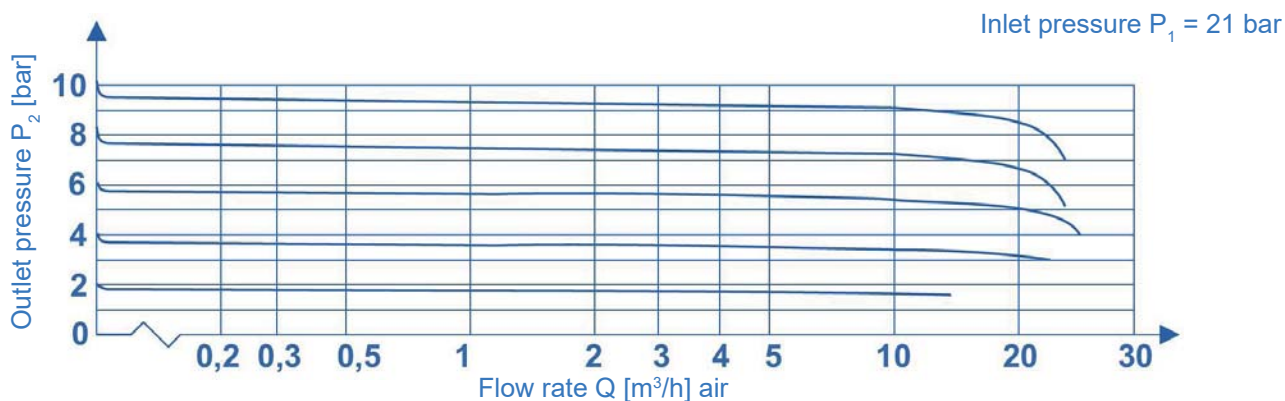

# Panel / Line regulator E53-2



## Dimensions E53-2


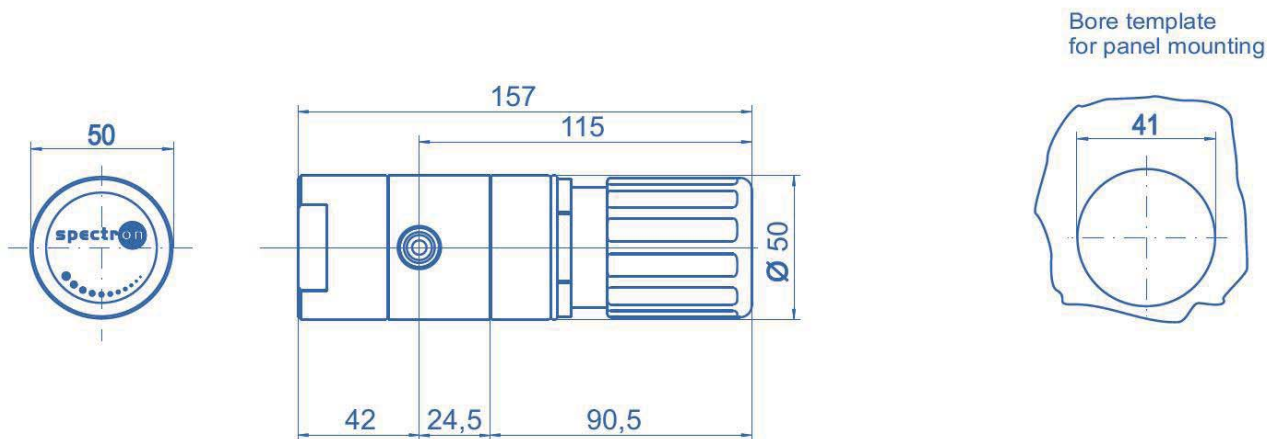


## Ordering information:

Pressure regulators E53-2

### In- / outlets

- CE 1/4** 1/8" / 1/4" / 1/2" - compression fitting (stainless steel)
- CE 6** 3 / 6 / 8 / 10 / 12 mm - compression fitting (stainless steel)
- 0** 1/4"-NPT-F (port only)

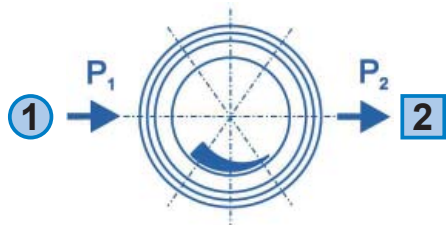

**LE53 - 2 - 300 - 20 - 1 - 2 - H2**

### Type

- L** Line regulator
- P** Panel regulator

### Inlet pressure $P_1$

- 100** max. 100 bar
- 200** max. 200 bar
- 300** max. 300 bar

### Outlet pressure $P_2$

- 1,5** max. 1,5 bar ( $P_1 \leq 50$  bar)
- 4** max. 4 bar ( $P_1 \leq 50$  bar)
- 10** max. 10 bar
- 20** max. 20 bar

### Type of gas

Please specify type of gas

For inlet pressure up to 50 bar and outlet pressure of max. 1,5 or 4 bar please use E51.